




FP
5ZA1
561
2.5





RF8

■ 标准品一览表

| 额定电压 (V) (编码) | 浪涌电压 (V) | 额定静电容量 (μF) | 铝壳尺寸 φD×L (mm) | 损失角正切值 (tan δ) | 漏损电流 (μA, 2min.) | ESR (mΩ) (20°C/100kHz) | ESL (Typ.) (nH, 40MHz) | 额定纹波电流 (mA rms) (105°C/100kHz) | 品号 | FPCAP品号 |
|---------------|----------|-------------|----------------|----------------|------------------|------------------------|------------------------|--------------------------------|----------------|-------------------|
| 2.5 (0E) | 2.8 | 100 | 5×8 | 0.10 | 500 | 7 | 1.5 | 4200 | RF80E101MDN1□□ | FP-2R5RE101M-F8□□ |
| | | 330 | 5×8 | 0.10 | 500 | 7 | 1.5 | 4200 | RF80E331MDN1□□ | FP-2R5RE331M-F8□□ |
| | | 470 | 5×8 | 0.10 | 500 | 7 | 1.5 | 4200 | RF80E471MDN1□□ | FP-2R5RE471M-F8□□ |
| | | 560 | 5×8 | 0.10 | 500 | 7 | 1.5 | 4200 | RF80E561MDN1□□ | FP-2R5RE561M-F8□□ |
| 4.0 (0G) | 4.6 | 330 | 5×8 | 0.10 | 500 | 8 | 1.5 | 4000 | RF80G331MDN1□□ | FP-4R0RE331M-F8□□ |
| 6.3 (0J) | 7.2 | 270 | 5×8 | 0.10 | 500 | 11 | 1.5 | 3700 | RF80J271MDN1□□ | FP-6R3RE271M-F8□□ |
| | | 330 | 5×8 | 0.10 | 500 | 11 | 1.5 | 3700 | RF80J331MDN1□□ | FP-6R3RE331M-F8□□ |

■ 频率特性 (是代表例子, 不是保证性能)

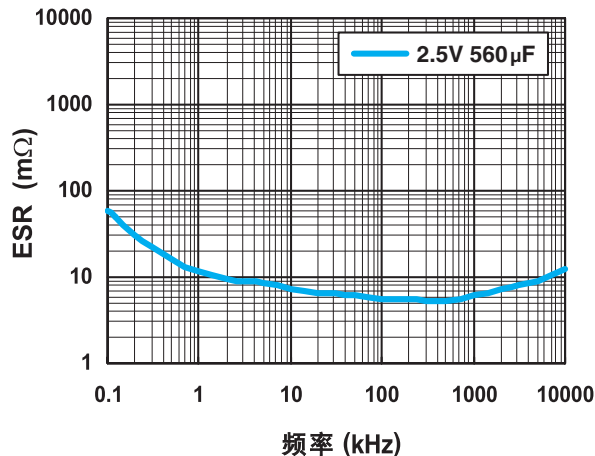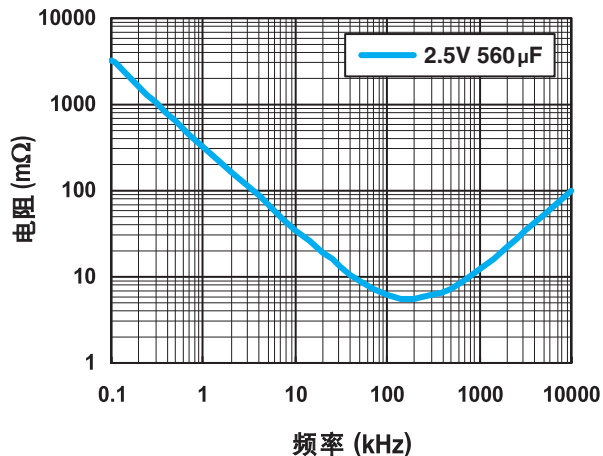

- 关于引线加工, 编带仕様, 请参照第24页和第25页。
- 订货单位请参照第3页。